

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
22 April 2004 (22.04.2004)

PCT

(10) International Publication Number
WO 2004/033983 A2

(51) International Patent Classification⁷:

F41C

(74) Agent: CRUTCHER, William, C.; McCormick Paulding
& Huber, LLP, CityPlace II, 185 Asylum Street, Hartford,
CT 06103 (US).

(21) International Application Number:

PCT/US2003/030290

(81) Designated States (*national*): AE, AU, BA, BR, BZ, CA,
CN, CO, DZ, EC, GE, HR, IL, IN, JP, KE, KR, LT, LV,
MA, MG, MK, MX, NO, NZ, OM, PH, PL, SD, SG, SY,
TN, UA, US, UZ, VN, YU, ZA.

(22) International Filing Date:

26 September 2003 (26.09.2003)

(84) Designated States (*regional*): Eurasian patent (AM, AZ,
BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE,
BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU,
IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR).

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

60/416,030

3 October 2002 (03.10.2002)

US

Published:



— without international search report and to be republished
upon receipt of that report

(71) Applicant and

(72) Inventor: MOORE, Wildey, J. [US/US]; 45 Angevine
Road, Warren, CT 06794 (US).

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: DOUBLE ACTION, HAMMER TRIGGER MECHANISM FOR A FIREARM

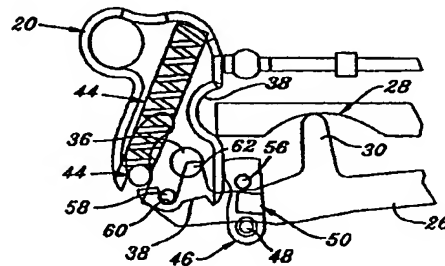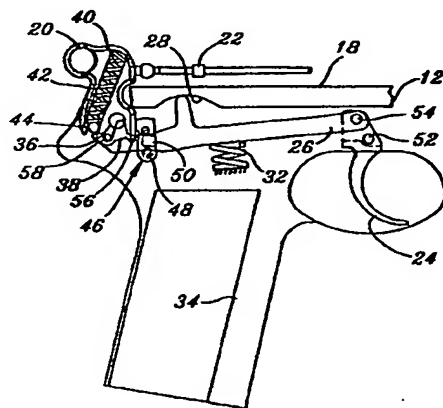

(57) **Abstract:** Double action, hammer trigger mechanism for a semi-automatic firearm (10) with a spring loaded slide (12) having a cam surface (28), a pivoting sear (46) to hold the hammer (20) in a cocked position and a transfer bar (26) connected to a pivot pin (54) on the trigger (24). The transfer bar has a cam finger (30) to move the transfer bar down when the slide moves in a rearward direction during firing. When the sear is holding the hammer cocked, a second finger (62) on the transfer bar is arranged to engage a single action let-off pin (56) on the sear and pivot the sear when the trigger is pulled so as to release the hammer. The cam finger also moves the transfer bar down when the slide is stationary and the trigger is operated. The transfer bar has a notch (60) receiving a double action let-off pin (58) on the hammer to cause the transfer bar to pivot the hammer in a cocking direction as the trigger is pulled. This motion moves the transfer bar notch away from the double action let-off pin to release the hammer when the trigger is pulled to a double action let-off position before the hammer reaches the cocked position.

WO 2004/033983 A2